
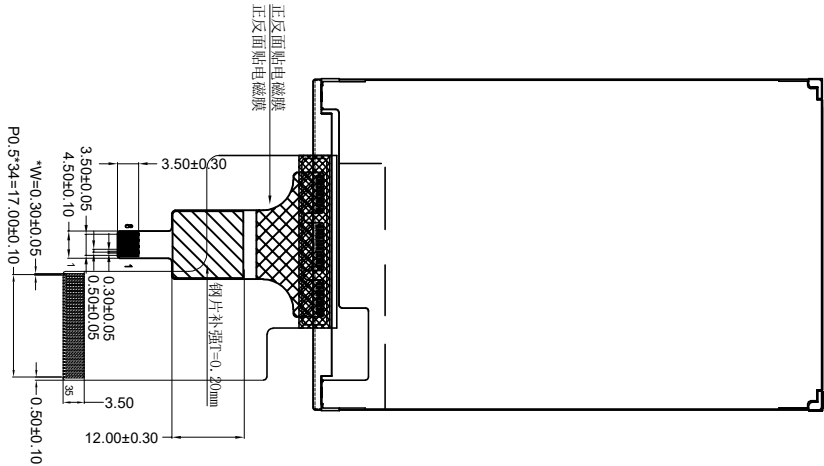


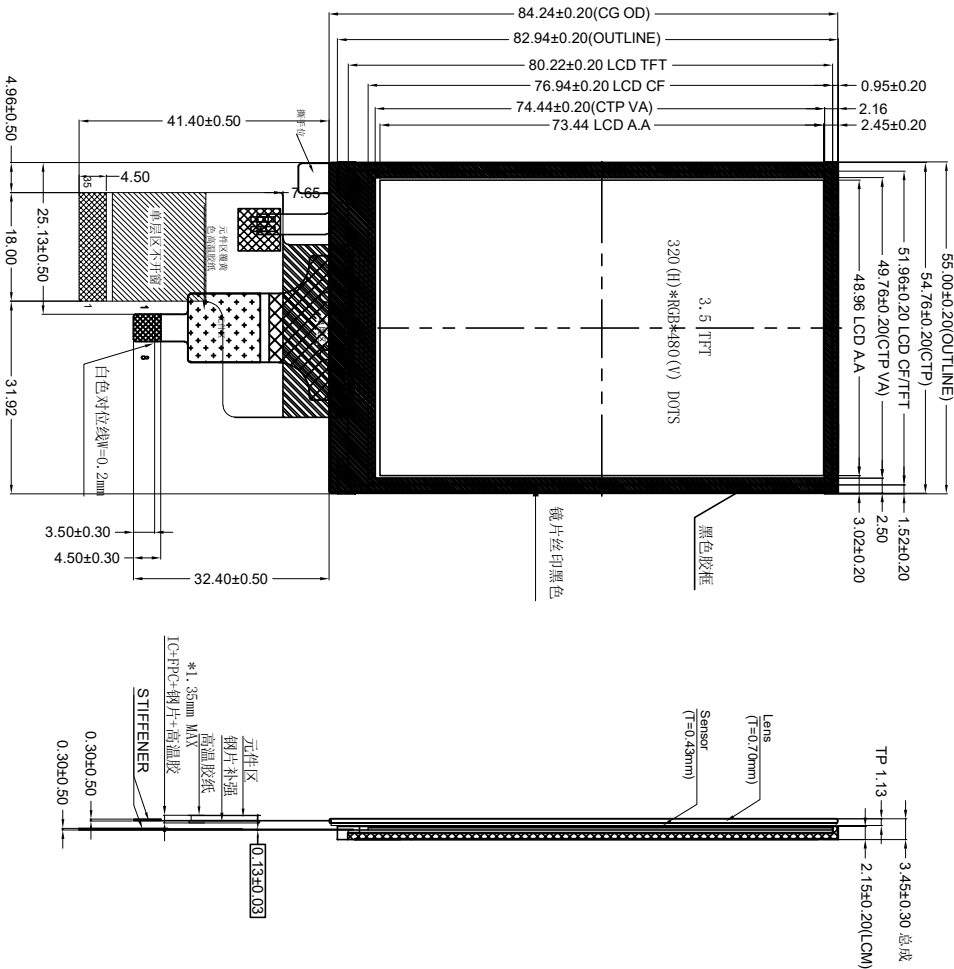



CTP PIN DESCRIPTION

PIN SYMBOL	
1	VDD
2	RST
3	INT
4	NC
5	NC
6	SCL
7	SDA
8	GND

1	GND
2	VCI
3	IOVCC
4	RESET
5	CS
6	SCL
7	VS1NC
8	HSYNC
9	ENABLE
10	DOTCLK
11	SDA
12	SDA
13	(R0)
14	(R2)
15	(R3)
16	(R4)
17	(R5)
18	(G0)
19	(G1)
20	(G2)
21	(G3)
22	(G4)
23	(G5)
24	(R0)
25	(R1)
26	(R2)
27	(R3)
28	(R4)
29	(R5)
30	GND
31	LEDA
32	LEDA
33	LEDA
34	LEDA
35	LEDA

FPC展开出货

Waiken Optoelectronics



A

A

B

B

C

C

D

D

DISPLAY TYPE:	3.5" TFT	DISPLAY DRIVER:	ST7796S	PIXEL PITCH:	0.153 X 0.153 mm	产品型号:	WK35212
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M ²):		部品型号:	LCM外形图
VIEWING DIRECTION:	FREE	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X8), 串联	版本:	V2
Dot matrix:	320(RGB)*480 DOTS	STRUCTURE:	LCD+IC+PPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST	日期:	2021.9.10
THIS DRAWING IS PROPERTY OF WAIKEN OPTOELECTRONICS CO. LTD. IT CANNOT BE REPRODUCED WITHOUT PERMISSION.				UNMARKED TOLERANCE:	±0.30 mm	比例:	1:1
				设计:		审核:	侯育博
						页码:	1 OF 1